



Tired of doing weights?


Power Team's Light Weight Hand Pump



could be your answer...

Sales of our "L" Series Super Light Weight hand pumps continue to exceed our expectation as more and more end users select this light weight hand pumps as their pump of choice for their plant and maintenance jobs.

The P19L and P59L hand pumps are the perfect choice because they are light weight, tough and easy to carry and position in place. They also enable the job to be done faster and easier with reduced operator fatigue.

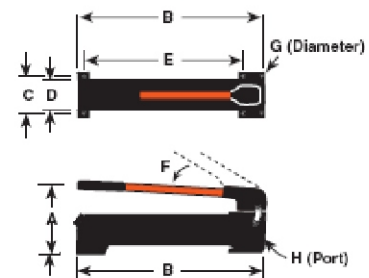

Pump No.	A (in.) (mm)	B (in.) (mm)	C (in.) (mm)	D (in.) (mm)	E (in.) (mm)	F (deg.)	G (in.)	H (in.)
P19L	(in.) 5.57	13.66	4.10	3.25	11.06	40°	5/16	3/8 NPTF
	(mm) 141.5	347	104.1	82.6	281	40°	M6	3/8 NPTF
P59L	(in.) 6.99	21.00	4.95	3.25	19.75	50°	5/16	3/8 NPTF
	(mm) 177.6	533.4	120.7	82.6	501.7	50°	M6	3/8 NPTF

For Use With	Order No.	Volume per Stroke		Maximum Pressure		Handle Effort	Reservoir Oil Capacity	Usable Oil Capacity	Oil Port	Product Weight	
		Speed LP	HP	LP	HP						
Single Acting Cylinders	P19L (Imperial)	2	.25 in ³	.05 in ³	850 PSI	10,000 PSI	78 lbs	29 in ³	27 in ³	3/8 NPTF	5.1 lbs
		(Metric)	2	4.1 cm ³	0.8 cm ³	59 bar	700 bar	35.4 kg	475 cm ³	443 cm ³	3/8 NPTF
	P59L (Imperial)	2	.72 in ³	.15 in ³	850 PSI	10,000 PSI	104 lbs	69 in ³	66 in ³	3/8 NPTF	8.9 lbs
		(Metric)	2	12 cm ³	2.5 cm ³	59 bar	700 bar	47.2 kg	1131 cm ³	1062 cm ³	3/8 NPTF

The high grade light weight aluminium construction resists corrosion, stands up to heat, withstands welding splatter and many other harsh environments where composite pumps may not be suited. These light weight hand pumps provide a higher volume of oil per stroke and have an improved link and handle design enabling the job to be completed faster and with less effort.



THE QME SHOW 2008 IS NEARLY UPON US!

PT Hydraulics once again will be proudly supporting our distributors. We look forward to seeing you there.

For more information please contact your Regional Sales Manager or PT Hydraulics Head Office