



ATO POWER UNITS



PT HYDRAULICS AUSTRALIA



ASSEMBLED TO ORDER

- PT Hydraulics builds “Assemble To Order” Power Units to your specification. Whatever your requirements PT Hydraulics Australia can service you.

ATO HYDRAULIC POWER		ATO Request For Quote Form		THE PROFESSIONAL TEAM PT HYDRAULICSAUSTRALIA									
Duty Cycle	Continuous	Intermittent	Use Once										
Working Pressure Bar/PSI				Customer									
Pressure Relief Valve	YES	NO	Name										
Relief Valve Setting?				Signature									
Flow- LPM													
Pump Displacement	GP1	1.1cc	1.3cc	1.8cc	2.1cc	2.7cc	3.2cc	3.7cc	4.2cc	4.8cc	5.8cc	8.0cc	
	GP2	4cc	6cc	8cc	10cc	12cc	14cc	16cc	20cc	25cc			
	GP3	20cc	26cc	33cc	39cc	46cc	55cc	63cc					
Motor	AC	240volt			415volt			AIR		DC		ENGINE	
		2P	4P	6P	8P			12V	24V	PETROL	DIESEL		
Tank Capacity-LTR	40	50	75	130	200	300	400						
Return Filtration	Yes	No	Micron		5um	10um	25um	Clogging Indicator		YES	NO		
Pressure Gauge	Yes	No	Test Point		No	Yes							
Manifold	CT3	P & T with Relief					Series						
	CT5	Bulkhead Only					Parallel						
Directional Control Valves			AS1				Other		Z11				
			CS1										
			R11										
			CT11										
			H11										
			Y11										
Control Voltage	12VDC	24VDC	24VAC	115VAC	240VAC								
Options	Pendant		Other Options										
	Wiring Loom												
	Power Lead												


Specification Selection Sheet





CUSTOM CONTROLS

- PT Hydraulics specialise in fully wired power units. With a selection of pendant or wireless controls or just start-stop buttons on the enclosure your ATO Power Unit can be tailored to meet your specific needs, all at a very competitive price.

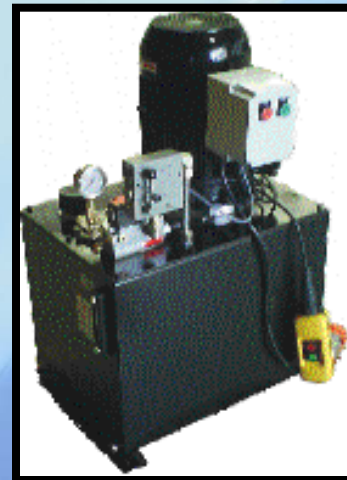



THE EASE OF ATO


- PT Hydraulics have designed a custom quality program enabling quick and easy quoting of your unique ATO Power Unit

ATO Request For Quote Form

ATO HYDRAULIC POWER **PT HYDRAULICS AUSTRALIA**

Duty Cycle	Continuous	Intermittent	Use Once	Customer Name									
Working Pressure (Bar)				Signature									
Pressure Relief Valve	YES	NO											
Relief Valve Setting?													
Flow-LPM	0.5F	1.1F	1.3F	1.6F	2.1F	2.7F	3.2F	3.7F	4.2F	4.8F	5.6F	6.0F	
Pump Displacement	GP2	40C	60C	80C	100C	120C	140C	160C	200C	250C			
	GP3	200C	250C	330C	380C	460C	550C	630C					
Motor	AC	34Volt	415Volt		AIR				DC	ENRGIE			
	3P	4P	6P	8P					12V	24V	PETROL	DIESEL	
Tank Capacity-LTR	40	50	75	100	200	300	400						
Return Filtration	Yes	No			Micron	5um	10um	25um			Clogging Indicator	YES	NO
Pressure Gauge	Yes	No			Test Point	No	Yes						
Manifold	CTS	P & T with Relief			Send								
	CTS	Blockhead Only			Parallel								
Directional Control Valves					A41								
					C51								
					B11								
					C11								
					H11								
					Y11								
Control Voltage	12VDC	24VDC	34VDC		24VAC	115VAC	230VAC						
Options	Percent	Other Options											
	Wiring Loom												
	Power Lead												

Specification Selection Sheet

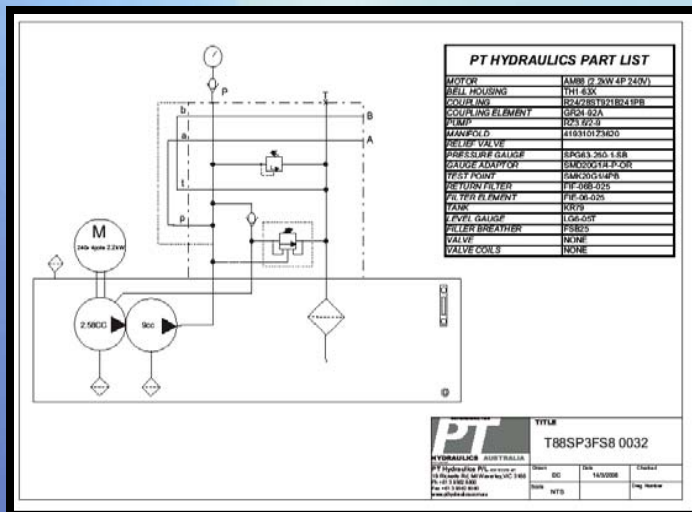




ATO COMPONENTS

- All Power units in the ATO Range are built from quality imported and locally sourced components ensuring quality, reliability and performance.



- Other components available on ATO Power Units include:
 - Gear or Piston Pumps
 - Manifolds with up to 6 valve positions
 - Hi-Lo Manifold
 - Pressure gauges
 - Level Temp gauges
 - AC or DC motors
 - Coolers
 - Return Filters
 - Suction Strainers
 - Pressure switches
 - Manual or Solenoid DCV's
 - Control sub-plates
 - Wiring looms
 - Test points
 - Filter breathers
 - Tanks – 20L to 400L

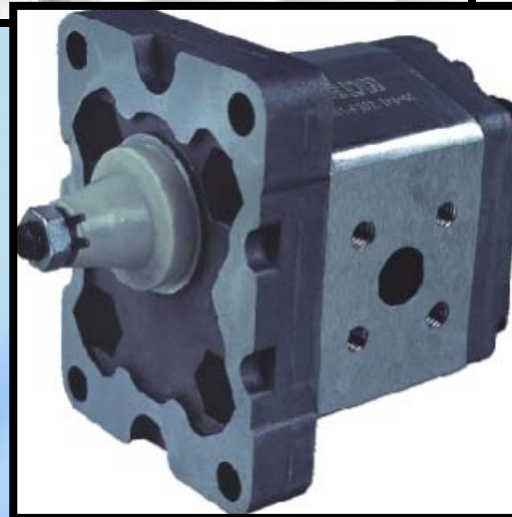



CUSTOMIZE YOUR ATO UNIT



Product Code	T88SP3FS80032
Power	2.2KW 4P 1PH
Pressure	350 BAR
Pump CC	2.5/9
Return Filter	FIE-06-025

- All PT Hydraulic ATO Power Units carry PT's "ATO Power" logo however you can customize your ATO Power Unit with your own company logo.





MORE INFORMATION

For more information on
PT Hydraulics ATO Power Units please contact
PT Hydraulics Australia Head Office.

PT Hydraulics Australia Pty Ltd

19 Ricketts Rd

Mt Waverley Vic 3149

Ph: 03 9562 8800 Fax: 03 9562 8080

www.pthydraulics.com.au

